



**B.E.G.** **LUXOMAT**<sup>®</sup> net



**DALI LINK Einzelraumlösung / Single Room Solution / Solution pièce individuelle**  
**STARTERSET-DALILINK-SMALL-OFFICE - 93840**


\*Strongbox and DALI Gateway nicht enthalten / \*Hubbox and DALI Gateway nicht enthalten / \*Strongbox et boîtier DALI ne pas inclure



**DALI LINK STARTERSET**

# 1.1.

Bitte lesen!  
Please read!  
Merci de lire !

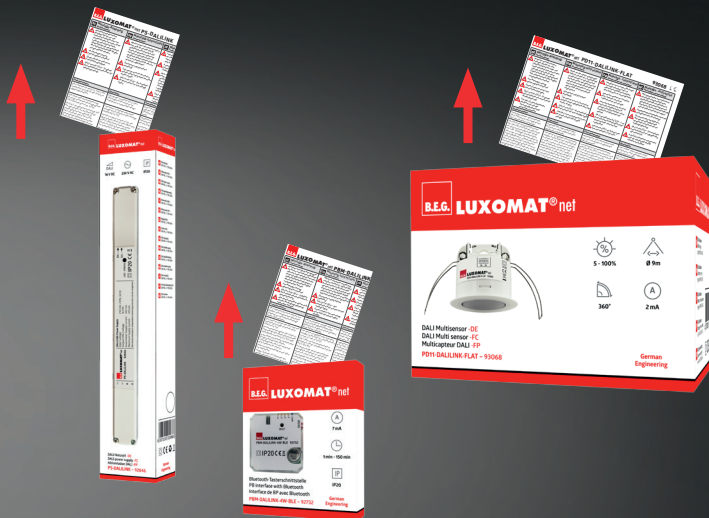


# 1.2.


Auf erlaubte Topologie achten!

Consider allowed topology!


Les types de câblages autorisés !




Bus




Ring



Star



Extended Star




Hierarchical



Mesh

# 1.3. Nur niederspannungsfestes Kabel nutzen! Use wires according to low voltage regulatories only! Câble à utiliser !



NYM-J (1,5mm<sup>2</sup> / 2,5mm<sup>2</sup>)



J-Y(ST)Y

# 2.1.

App installieren!




Install the app!

Installez L'application !






# 2.2.

Sprache wählen!  
Select language!  
Choisissez la langue !

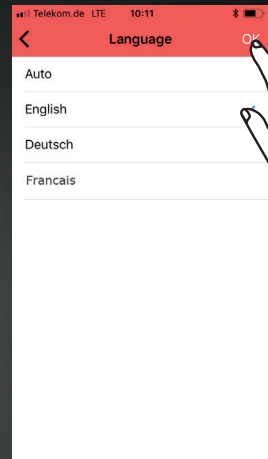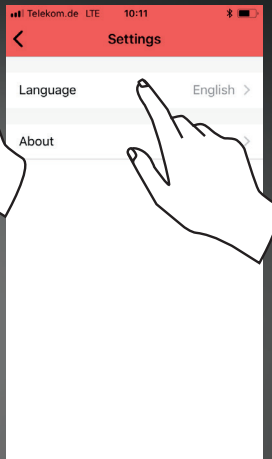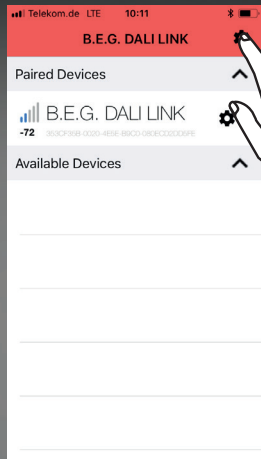

# 2.3.




Raum/Ort benennen!  
Name room/location!  
Nommez le lieu / pièce !

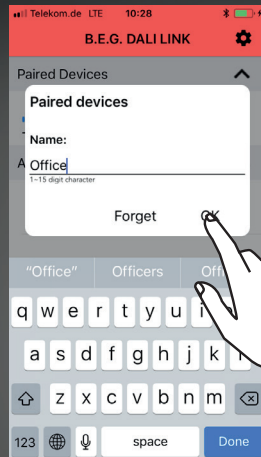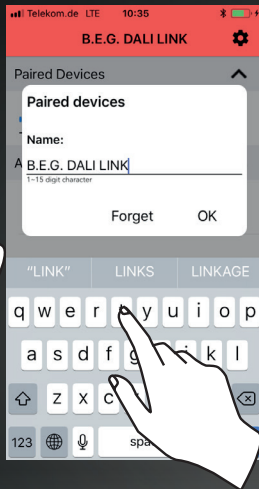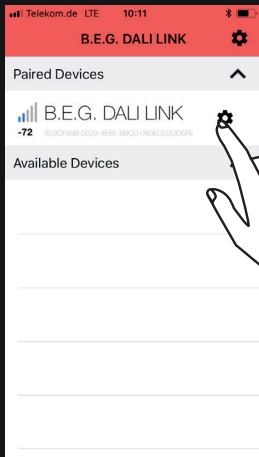






# 2.4.

Nutzen Sie „123456“ zum Koppeln!  
Use “123456” for pairing!  
Utilisez « 123456 » pour jumeler !

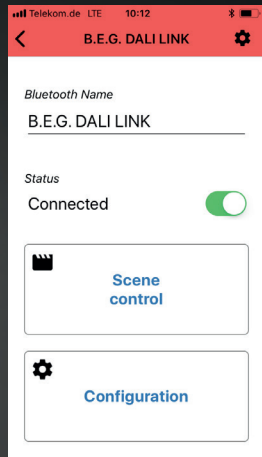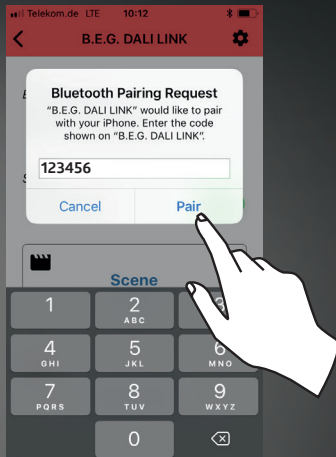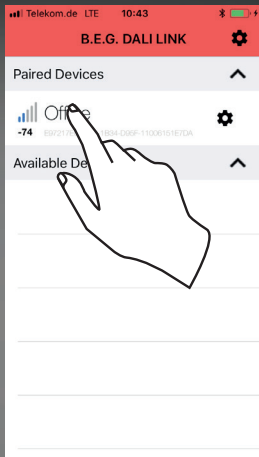



# 2.5.

Passwort ändern!  
Change password!  
Changez le mot de passe !

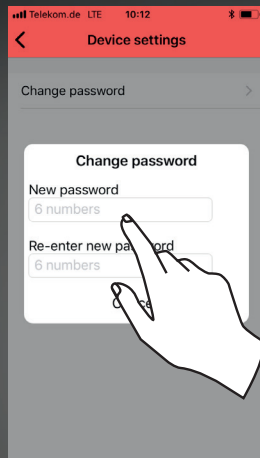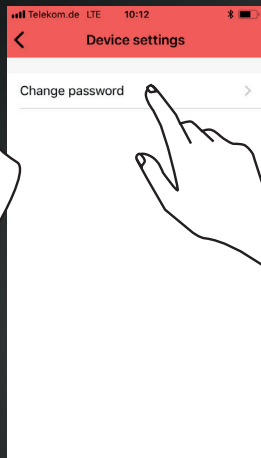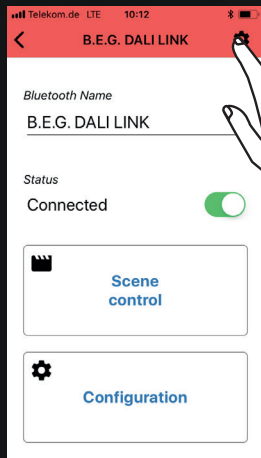




# 2.6.

Konfigurationsmodus mit QR-Code freischalten!  
Unlock configuration mode with QR code!  
Entrez dans le mode configuration avec le QR-Code !


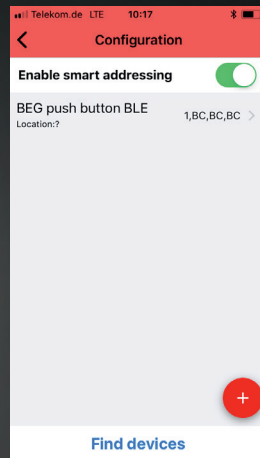
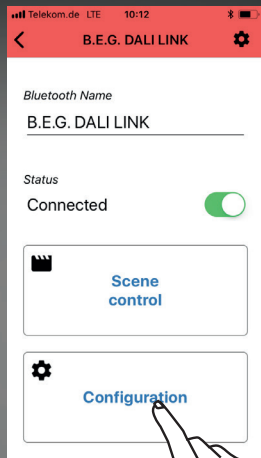


# 3.1.

Finden/adressieren Sie Geräte!  
Find/address devices!  
Trouvez/Adressez les participants !

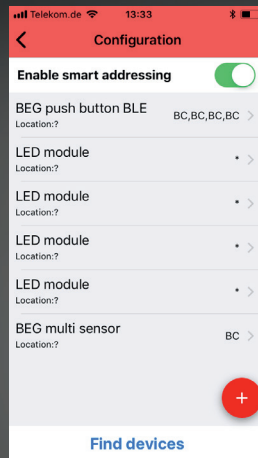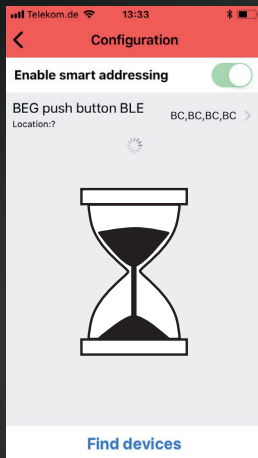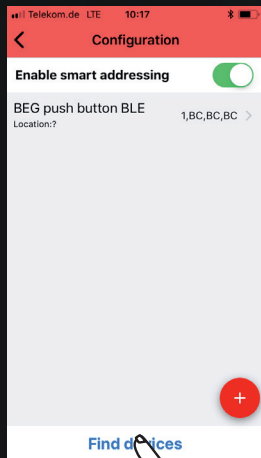

# 3.2. Benennen und gruppieren Sie Geräte! Name and assign group id's to the devices! Nommez et Groupez les participants !

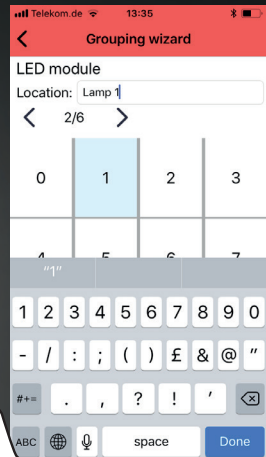
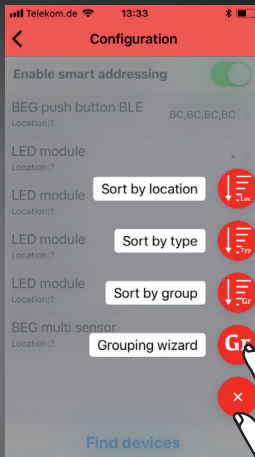
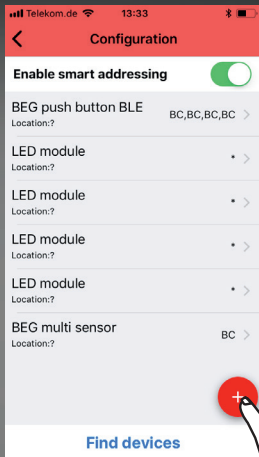


# 3.3.

Ändern Sie Geräteparameter wie gewünscht!




Change device parameters at will!

Changez les paramètres des participants comme vous le souhaitez !

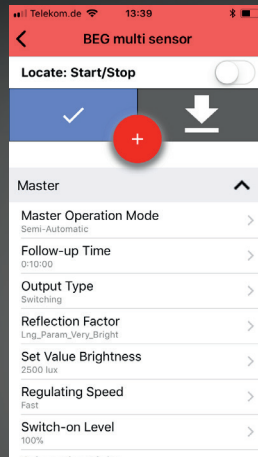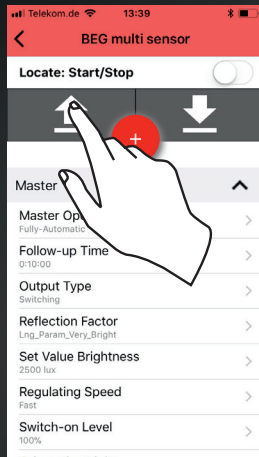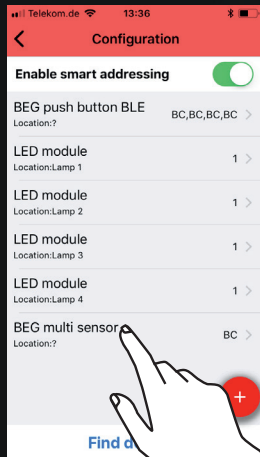

# 4.1.

Erstellen Sie Szenen!  
Create scenes!  
Configurez des scènes !

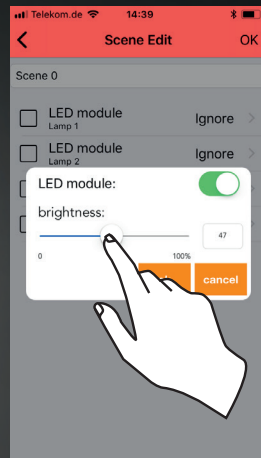
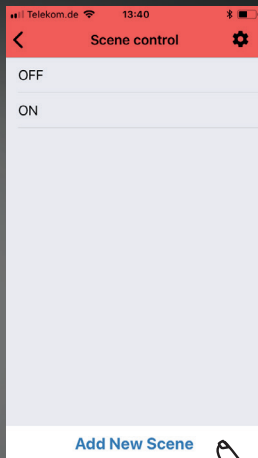
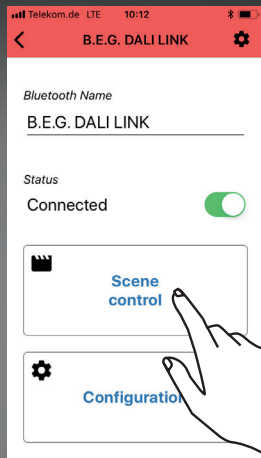


# 4.2.

Bearbeiten oder löschen Sie Szenen!

Edit or delete scenes!




Modifiez ou supprimez des scènes !

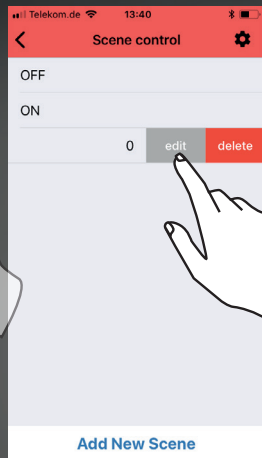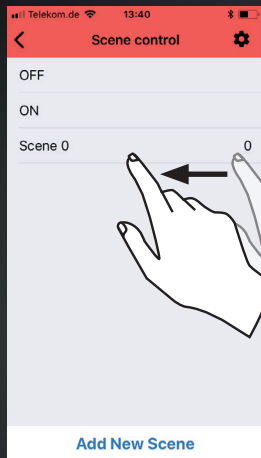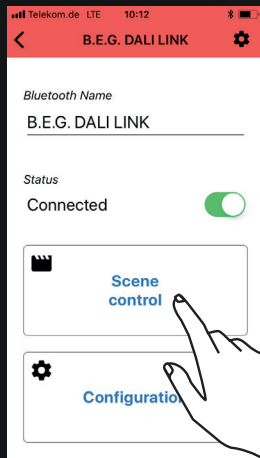



# 5.1.

Fehlermeldungen!  
Error messages!  
Messages d'erreurs !

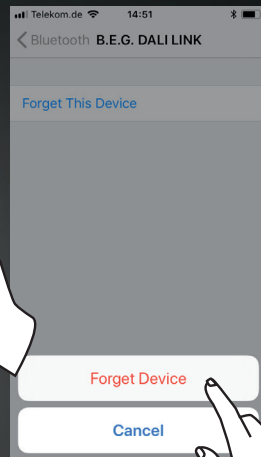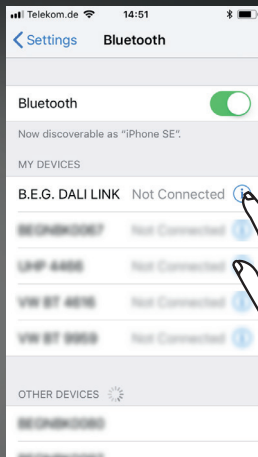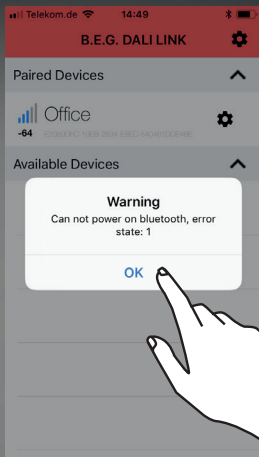

# 6.1.

Applikationsbeschreibung herunterladen ([beg-luxomat.com/loesungen/dali-link/](http://beg-luxomat.com/loesungen/dali-link/))!  
Download the application description ([beg-luxomat.com/en/solutions/dali-link/](http://beg-luxomat.com/en/solutions/dali-link/))!  
Obtenez plus d'informations ([beg-luxomat.com/fr/solutions/dali-link/](http://beg-luxomat.com/fr/solutions/dali-link/))!

The screenshot shows a web browser displaying the B.E.G. website. The page is titled "DALI LINK" and features a navigation menu with "PRODUCTS", "SOLUTIONS", "USERS", "SERVICE", and "THE COMPANY". The main content area includes a large image of a hand holding a smartphone with a control app, surrounded by icons representing various DALI LINK components like a light fixture, a sensor, and a gateway. A text box on the right describes DALI LINK as "The intelligent and economical single room solution from B.E.G.". Below this, a section titled "DALI LINK single room solution" provides a detailed description of the entry-level set for small offices, including a DALI LINK power supply, a PD11 DALI LINK multisensor, and a DALI LINK 4-way pushbutton interface. It also mentions that the super flat PD11 is a first choice for demanding architectural considerations. A final paragraph explains that unlike other systems, the DALI LINK PD11 is not only a multisensor but also a master occupancy detector with its own intelligence as a controller, making it highly fail-safe, expandable, and economical. All components are available individually, suitable for larger rooms like conference rooms and classrooms.

**B.E.G.**

PRODUCTS SOLUTIONS USERS SERVICE THE COMPANY

SEARCH CONTACT GREAT BRITAIN

**DALI LINK**


The intelligent and economical single room solution from B.E.G.

Solutions - DALI LINK

**DALI LINK single room solution**

The entry-level set for small offices consists of a DALI LINK power supply, a PD11 DALI LINK multisensor and a DALI LINK 4-way pushbutton interface with built-in Bluetooth gateway. The super flat PD11 is the first choice for the most demanding architectural considerations, with a large detection range for its class.

Unlike other systems, the DALI LINK PD11 is not only a multisensor but also a master occupancy detector with its own intelligence as a controller. Therefore B.E.G. DALI LINK is highly fail safe, expandable and economical. All components are also available individually, so that larger rooms such as conference rooms and classrooms can be covered.

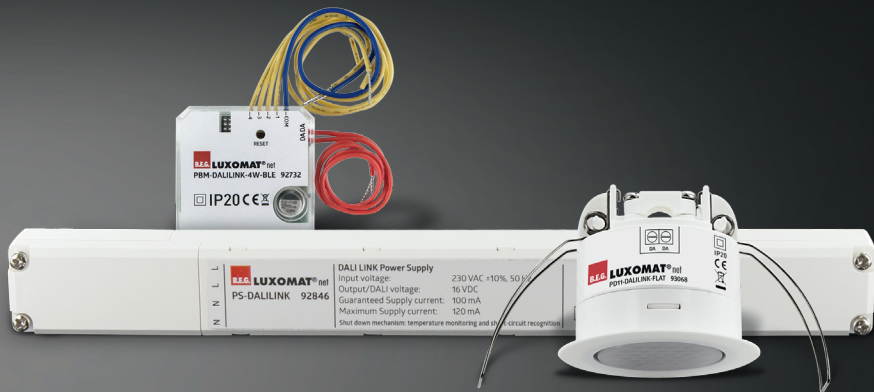

RESET  
DALI  
DALI LINK Power Supply  
**LUXOMAT<sup>net</sup>**  
PBM-DALILINK-4W-BLE 92732  
IP20 CE

L  
L  
N  
N

**LUXOMAT<sup>net</sup>**  
PS-DALILINK 92846

DALI LINK Power Supply  
Input voltage: 230 VAC ±10%, 50 Hz  
Output/DALI voltage: 16 VDC  
Guaranteed Supply current: 100 mA  
Maximum Supply current: 120 mA  
Shut down mechanism: temperature monitoring and short-circuit recognition

IP20  
**LUXOMAT<sup>net</sup>**  
P011-DALILINK-FLAT 93068



**B.E.G. Brück Electronic GmbH**

Gerberstraße 33  
51789 Lindlar

T +49 (0)2266-90121-0  
F +49 (0)2266-90121-50

info@beg.de  
beg-luxomat.com